

# AX1800 Dual-Band Wi-Fi 6 Gigabit VolP Router

MODEL: EX230v



## **Overview**

EX230v is a Wi-Fi 6 (802.11ax) dual-band VoIP wireless router with full gigabit ports. Take the Wi-Fi experience to the next level while being backwards compatible with 802.11a/b/g/n/ac Wi-Fi devices. Perfect for FTTH deployment and a connected home.



### AX1800 Dual Band Wi-Fi

Deliver total Wi-Fi speeds up to 1.8 Gbps (1201 Mbps on 5 GHz, and 574 Mbps on 2.4 GHz) based on 802.11ax Wi-Fi technology.



# Gigabit Internet Access

Take full advantage of the broadband with speed up to 1 Gbps through a gigabit WAN port and three gibabit Ethernet LAN ports for fast and reliable wired connections.



# Supports VoIP Calls

Support multiple VoIP accounts and various call features, such as caller ID, call waiting, call holding and call forwarding to surpass traditional landlines.



## **Easy Remote Management**

TR-069 and TR-369 protocols, Aginet app, and TAUC (TP-Link Aginet Unified Cloud) are supported, service providers can manage multiple devices remotely.



## **Features**



#### **Faster Wireless Connection**

Combined with the new Wi-Fi technology, including 1024QAM, HE80 and 4x Longer OFDM Symbol, EX230v achieves Wi-Fi performance at an ultimate level. EX230v is faster than ever, leading up to 574 Mbps on the 2.4GHz band and 1201Mbps on the 5GHz band.



### Cater for Standardized Mesh Technology

EasyMesh is a standard mesh technology developed by Wi-Fi Alliance. EX230v adopts EasyMesh technology, which has further improved and standardized Wi-Fi functions, such as Wi-Fi diagnostics, channel selection and traffic separation.



#### MU-MIMO: Efficient Wi-Fi for Every Device


MU-MIMO technology serves multiple devices at once. No more bandwidth congestion or latency. All devices get their data faster and Wi-Fi is used more efficiently.



### **Beamforming for Better Corverage**

Beamforming technology detects the location of your connected devices and concentrates the EX230v's Wi-Fi towards them to create stronger overall connections.

# **Hardware Description**

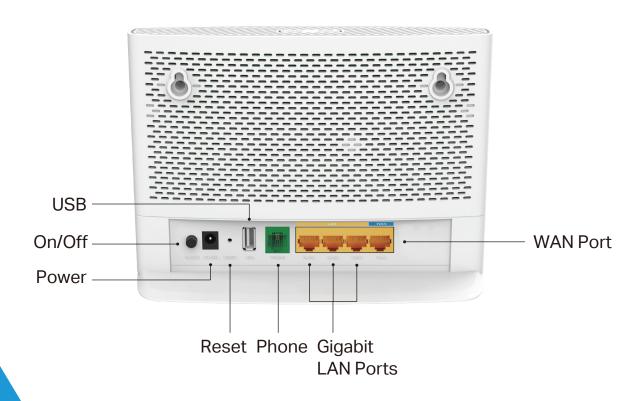



# **Specifications**

#### Hardware

Interface

3× 10/100/1000 Mbps RJ45 LAN Ports, 1× 10/100/1000 Mbps RJ45 WAN Port, 1× FXS Port, 1× USB 2.0 Port

Antenna

Internal Wi-Fi antennas

External Power Supply

Output: 12V/1.5A

Input: 100-240V~50-60Hz 0.8A

Dimensions (W \* D \* H)

7.9 x 5.9 x 2.7 in (199.7 x 148.6 x 67.5 mm)

• CPU

900 MHz Dual-Core CPU

• Button

Power On/Off Button, Reset Button, WPS Button, Wi-Fi Button

#### **Wireless**

· Wireless Standards

IEEE 802.11a/n/ac/ax 5 GHz, IEEE 802.11b/g/n/ax 2.4 GHz

Mesh Protocol

802.11k/v/r

Frequency

2.4 GHz and 5 GHz

• Signal Rate

1201Mbps at 5GHz, 574Mbps at 2.4GHz

• Transmit Power

CE: <20dBm (2.4GHz); <23dBm (5.15GHz~5.35GHz); <30dBm (5.47GHz~5.725GHz)

· Wireless Security

WPA/WPA2-PSK/WPA3 encryption

• Wireless Function

Enable/Disable Wireless Radio, WMM, Wireless Statistics, Multi-SSID, Guest Network, TX Beamforming

#### **Software**

· Working Mode

Router Mode

WAN Type

Dynamic IP/Static IP/PPPoE/PPTP/L2TP/Bridge Multi-EWAN

• Protocols

Supports IPv4 and IPv6

Multi SSID

Up to 3 SSIDs for each band (including main SSID)

Features

VoIP, Parental Control, Firewall, IPSEC VPN, IPv6, Port Forwarding, NAT Forwarding, Address Reservation, QoS(Quality of Service), CWMP, Network Diagnosis, Traffic Statistic, Cloud upgrade, 1024-QAM, MU-MIMO, OFDMA, EasyMesh

Management

Local management: WebGUI management, Aginet app management Remote management: TR-069, TR-181, TR369, TR-111, TR-143 Cloud management: TAUC

Firewall Security

DoS, SPI Firewall, IP and MAC Address Binding

#### **Others**

• System Requirements

Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1,10, MAC OS, NetWare, UNIX or Linux Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0 browers or higher.

Certification

CE, DFS

• Environment

Operating Temperature:  $0^{\circ}$ C  $\sim$ 40 $^{\circ}$ C ( $32^{\circ}$ F  $\sim$ 104 $^{\circ}$ F) Storage Temperature:  $-40^{\circ}$ C  $\sim$ 60 $^{\circ}$ C ( $-40^{\circ}$ F  $\sim$ 140 $^{\circ}$ F) Operating Humidity:  $10\%\sim$ 90% non-condensing Storage Humidity:  $5\%\sim$ 90% non-condensing

Package Contents

AX1800 Dual-Band Wi-Fi 6 Gigabit VolP Router EX230v

1× RJ45 Ethernet Cable

1× Power Adapter

1× RJ11 Cable

1× Quick Installation Guide