

Omada Gateway | Datasheet

ER706W

Omada AX3000 Gigabit VPN Gateway




Highlights

- AX3000 WiFi 6 with 2402 Mbps on 5 GHz and 574 Mbps on 2.4 GHz*
- 1 Gigabit SFP slot and 5 Gigabit RJ45 ports
- 1× USB 3.0 port (Supports USB storage, and LTE backup with LTE dongle)
- Load Balancing on up to 5 WAN ports raises the utilization rate of multi-line broadband
- Mesh with Omada access points to extend WiFi without extra cabling and switch**
- Centralized cloud management via the web or the Omada app
- High-security SSL/ IPSec / GRE† / WireGuard / PPTP / L2TP VPN & OpenVPN
- DoS defense, IP/MAC/URL filtering, DPI, and IPS/IDS for enhanced security

Omada Solution

Omada's Software Defined Networking (SDN) platform integrates network devices, including access points, switches, and gateways, providing 100% centralized cloud management. Omada creates a highly scalable network—all controlled from a single interface.

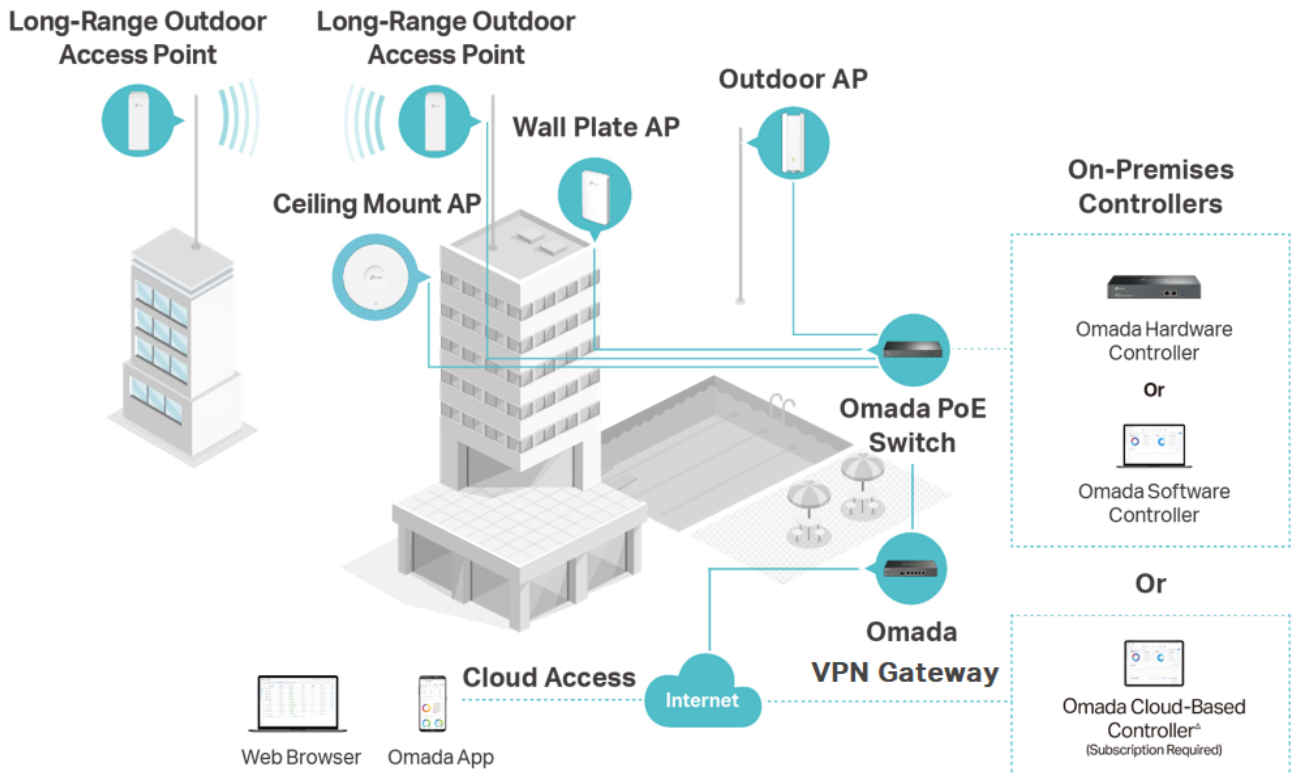

Hassle-Free Cloud or On-Premises Controllers



Zero-Touch Provisioning (ZTP)*




Multi-Site Cloud Management



Intelligent Monitoring

Specifications

Model		ER706W V1.2
Product Picture		
Product Description		Omada AX3000 Gigabit VPN Gateway
Hardware	Standards and Protocols	IEEE 802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE 802.3x, IEEE 802.1q, TCP/IP, DHCP, ICMP, NAT, PPPoE, NTP, HTTP, HTTPS, DNS, IPSec, PPTP, L2TP, OpenVPN, WireGuard VPN, GRE VPN, SNMP, 802.11a/b/g/n/ac/ax
	Interface	1 Gigabit SFP WAN/LAN Port 1 Gigabit WAN port 4 Gigabit LAN/WAN ports
	USB	1 USB3.0 (supports USB LTE dongle and USB Storage)
	Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps HE160
	Antennas	2.4 GHz: 2x 3 dBi dual-band detachable antennas 5 GHz: 3x 4.5 dBi dual-band detachable antennas
	Network Media	10BASE-T: UTP category 3, 4, 5 cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 100BASE-TX: UTP category 5, 5e cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 1000BASE-T: UTP category 5, 5e, 6 cable (Max 100 m)
	Button	Reset button
	Power Supply	12VDC / 2A Power Adapter
	Flash	128 MB NAND
	DRAM	512 MB DDR4
	LED	SYS, WLAN, SFP, USB, WAN (1000M Link/Act, 100/10M Link/Act), WAN/LAN (1000M Link/Act, 100/10M Link/Act)
	Max Power Consumption	EU: 16.8W (with USB 3.0 connected), 11.8W (without USB 3.0 connected) US: 22.7W (with USB 3.0 connected) 18.2W (without USB 3.0 connected)
	Surge Protection	4 kV surge protection
	Mounting	Desktop/ Wall-mounting
Dimensions (W x D x H)	8.9 × 5.2 × 1.4 in (226 × 131 × 35 mm) (Antenna dimensions not included)	
SDN Support	Hardware Controller	Automatic Device Discovery Intelligent Network Monitoring Abnormal Event Warnings
	Software Controller	Unified Configuration Reboot Schedule
	Omada App	Captive Portal Configuration

Model		ER706W V1.2
Performance ¹	Concurrent Session	150,000
	New Sessions /Second	5,100
	Static IP NAT Throughput (Upload / Download)	937.2 Mbps/936.1Mbps
	DHCP NAT Throughput (Upload / Download)	945.8 Mbps /940.6Mbps
	PPPoE NAT Throughput (Upload / Download)	942.9 Mbps/942.9Mbps
	L2TP NAT Throughput (Upload / Download)	837.4 Mbps /881.5Mbps
	PPTP NAT Throughput (Upload / Download)	803.0 Mbps/910.5 Mbps
	66 Byte Packet forwarding rate (Upload / Download)	1,453,489 pps / 1,453,488 pps
	1,518 Byte Packet forwarding rate (Upload / Download)	81274 pps/ 91275 pps
	IPSec VPN Throughput	ESP-SHA1-AES256: 646.9Mbps ESP-SHA256-AES256: 642.8Mbps ESP-SHA384-AES256: 648.9Mbps ESP-SHA512-AES256: 658.4 Mbps
	GRE	Unencrypted: 624.2Mbps Encrypted: 301.5Mbps
	WireGuard VPN	393.5Mbps
	SSL VPN	126.7Mbps
	OpenVPN	129.3Mbps
	L2TP VPN Throughput	Unencrypted: 1034.0 Mbps Encrypted: 570.0 Mbps
	PPTP VPN Throughput	Unencrypted: 1165.0 Mbps Encrypted: 209.0 Mbps
Basic Functions	WAN Connection Type	Static IP Dynamic IP PPPoE (supports MRU Configuration) PPTP L2TP
	DHCP	DHCP Server DHCPv6 PD Server (only in Standalone Mode) DHCP Options Customization DHCP Address Reservation Multi-IP Interfaces Multi-Net DHCP
	MAC Clone	Modify WAN Address
	IPTV	IGMP v2/v3 Proxy, Custom Mode, Bridge Mode
	IPv6	StaticIP / SLAAC / DHCPv6 / PPPoE / 6to4Tunnel / PassThrough / Non-Address mode
	Stateful ACL	√

1. Rated specifications are based on test results using software version 1.0.0. Device performance may vary as a result of the actual scenario.

Model		ER706W V1.2
Basic Functions	mDNS Repeater	√
	Quality of Service	√
	Bridge VLAN	√
	VLAN	802.1Q VLAN
Wireless Function	Wireless Encryption	WPA/WPA2/WPA3 Personal, WPA/WPA2/WPA3 Enterprise
	Multiple SSIDs	16 in total (8 per radio)
	Enable/Disable Wireless Radio	√
	Enable/Disable SSID Broadcast	√
	Guest Network	√
	Automatic Channel Selection Algorithm	√
	Transmit Power Control	Adjust transmit Power on dBm
	Seamless Roaming	√
	Mesh	√ (with EAP that supports Mesh)
	OFDMA	√
	Beamforming	√
	MU-MIMO	√
	Rate Limit	Based on SSID/Client
	Load Balance	√
	Airtime Fairness	√
	Band Steering	√
	RADIUS Accounting	√
	MAC Authentication	√
	Reboot Schedule	√
	Wireless Schedule	√
Support Data Rates	802.11ax: 8 Mbps to 2402 Mbps (MCS0-MCS11, NSS = 1 to 2 HE20/40/80/160) 802.11ac: 6.5 Mbps to 2166.7 Mbps (MCS0-MCS11, NSS = 1 to 2 VHT20/40/80/160) 802.11n: 6.5 Mbps to 300 Mbps (MCS0-MCS15, HT20/40) 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	

Model		ER706W V1.2
Transmission	Load Balance	Intelligent Load Balance Application Optimized Routing Link Backup (Timing, Failover) Online Detection
	NAT	One-to-One NAT Multi-Net NAT Virtual Server Port Triggering ¹ NAT-DMZ FTP/H.323/SIP/IPSec/PPTP ALG UPnP
	Routing	Static Routing Policy Routing RIP ² OSPF ²
	Session Limit	IP-based Session Limit
	Bandwidth Control	IP-based Bandwidth Control
VPN	IPSec VPN	100 IPSec VPN Tunnels LAN-to-LAN, Client-to-LAN Main, Aggressive Negotiation Mode DES, 3DES, AES128, AES192, AES256 Encryption Algorithm IPsec Failover IKE v1/v2 MD5, SHA1, SHA2-384 and SHA2-512 Authentication Algorithm NAT Traversal (NAT-T) Dead Peer Detection (DPD) Perfect Forward Secrecy (PFS)
	PPTP VPN	PPTP VPN Server PPTP VPN Client (10) ³ 50 Tunnels PPTP with MPPE Encryption
	L2TP VPN	L2TP VPN Server L2TP VPN Client (10) ³ 50 Tunnels L2TP over IPSec
	GRE	Only in Standalone Mode
	WireGuard VPN	√
	SSL VPN	50 Tunnels
	OpenVPN	OpenVPN Server OpenVPN Client (5) ³ 55 OpenVPN Tunnels "Certificate + Account" Mode Full Mode

1. Port Triggering is supported only in Standalone Mode.
2. RIP and OSPF are supported only in Standalone Mode.
3. For PPTP VPN and L2TP VPN, ER706W can connect with up to 10 VPN servers. For OpenVPN, ER706W can connect with up to 5 VPN servers.

Model		ER706W V1.2
Security	Attack Defense	TCP/UDP/ICMP Flood Defense Block TCP Scan (Stealth FIN/Xmas/Null) Block Ping from WAN
	Filtering	Web Group Filtering ¹ URL Filtering Web Security ¹
	DNS Proxy	DNSSEC, DoH, and DoT
	ARP Inspection	Sending GARP Packets ARP Scanning ² IP-MAC Binding
	Access Control	Source/Destination IP Based Access Control
Authentication	Web Authentication	No Authentication Simple Password ³ Hotspot (Local User / Voucher ³ / SMS ³ / Radius ³) External Radius Server External Portal Server ³ LDAP
Management	Service	Dynamic DNS (Dyndns, No-IP, Peanuthull, Comexe, DDNS Customization)
	Maintenance	Web Management Interface Remote Management Export & Import Configuration SNMP v1/v2c/v3 Diagnostics (Ping & Traceroute) ⁴ NTP Synchronize ⁴ Port Mirroring CLI (only in Standalone Mode) Syslog Support
Others	Certification	CE, FCC, RoHS
	Package Contents	ER706W, Power Adapter, Quick Installation Guide
	System Requirements	Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7/8/8.1/10/11 MAC OS, NetWare, UNIX or Linux
	Environment	Operating Temperature: 0 °C to 40 °C (32 °F to 104 °F) Storage Temperature: -40 °C to 70 °C (-40 °F to 158 °F) Operating Humidity: 10% to 90% non-condensing Storage Humidity: 5% to 90% non-condensing

1. Web Group Filtering and Web Security are supported only in Standalone Mode.
2. ARP Scanning is supported only in Standalone Mode.
3. The following web authentication methods are supported only in Controller Mode: Simple Password, Voucher, SMS, Radius, and External Portal Server.
4. Diagnostics (Ping & Traceroute) and NTP Synchronize are supported only in Standalone Mode.

Ordering Information

Host Gateway

Model	Description
ER706W	Omada AX3000 Gigabit VPN Gateway

SFP Modules

Model	Description
SM311LS	Gigabit SFP module, Single-mode, LC interface, Up to 20km distance
SM311LM	Gigabit SFP module, Multi-mode, LC interface, Up to 550m distance
SM321A	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 20 km
SM321A-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 2 km
SM321B	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 20 km
SM321B-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 2 km

RJ45 SFP Modules

Model	Description
SM331T	1000BASE-T RJ45 SFP Module

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and coverage are not guaranteed and will vary.

**Omada Mesh Technology requires the use of EAPs that support mesh functionality. Please refer to <https://www.tp-link.com/en/omada-mesh/product-list/> to confirm which Omada EAPs are compatible with Omada Mesh. Additionally, ER706W also supports standalone Mesh. Please refer to <https://www.tp-link.com/en/standalonemesh/product-list/> to confirm the models that support standalone Mesh.

*Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: www.tp-link.com.

* Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2024 TP-Link